



SCHEMATIC



PCB LAYOUT

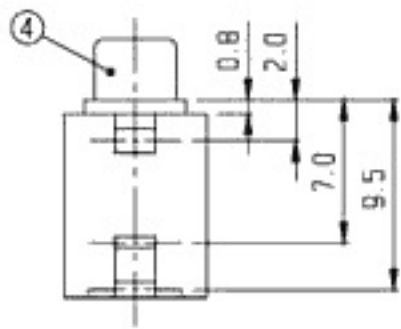

RoHS Compliance

NO.	PART	MATERIAL	QTY	REMARKS
4	SHEATH	BRASS	1	Ni PLATED
3	MOVEABLE TERMINAL	S U S	1	Ag PLATED
2	TERMINAL	BRASS	2	Ag PLATED
1	FRAME	A B S	1	

ISSUED

SPECIFICATION

TITLE: MONO TYPE EARPHONE JACK



RATING: DC 30V 0.3A
 CONTACT RESISTANCE: 50mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 5k cycles (15-18 cycles/min unloading)

MODEL NO: EJ-2506
 TOLERANCE: UP TO 1.0:±0.1
 UNIT: MM
 SCALE: 3:1
 VERSION: 1
 DRWG NO:

DWN. *hoo*
 CHK'D. *hoo*
 APPD. *hoo*