


RoHS
Compliance

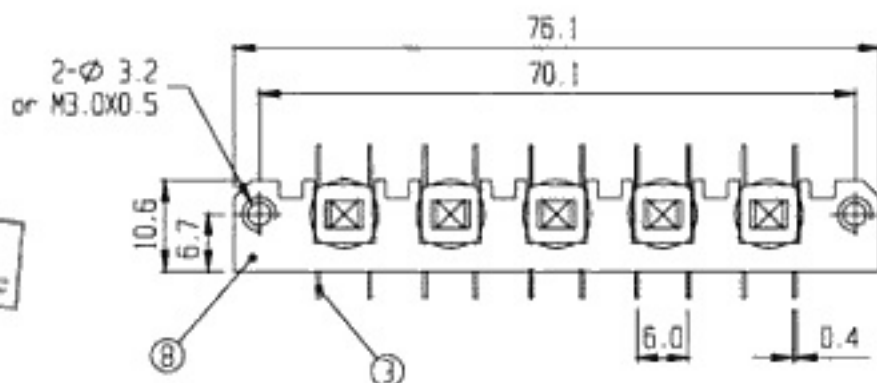

9	HOOK	STEEL WIRE			8	SHELF	S P C C	Ni PLATED	
7	LOCK PLATE	SPCC+SUS			6	SPRING	STEEL WIRE		
5	CONTACT	BRASS	Ag PLATED		4	TERMINAL BASE	NYLON		
3	TERMINAL	BRASS	Ag PLATED		2	KNOB	P O M		
1	FRAME	P C							
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PBS-MULTIPLE GANG

RATING: DC 30V 0.5A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: PBS-A5-2LAN3X2I-F18-H/W

TOLERANCE

UNIT: MM

DWN.

UP TO 1.0:±0.1

SCALE:1.25:1

CHK'D.

1.0 TO 10.0:±0.2

VERSION: 02

OVER 10.0:±0.3

DRWG NO:

APPD.

