


MATING PLUG



RoHS
Compliance



SCHEMATIC



PCB LAYOUT

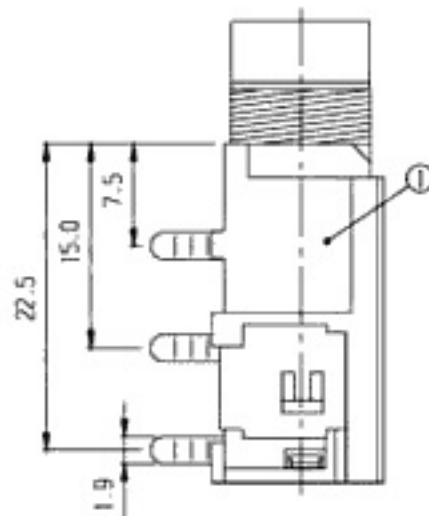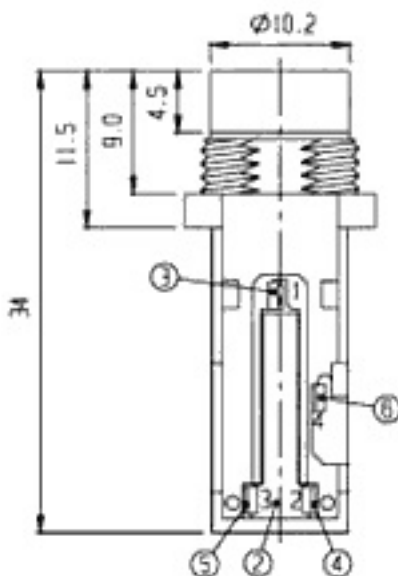

5	SPRING PLATE	BRASS	1	Ag PLATED	6	TERMINAL	BRASS	1	Ag PLATED
3	SPRING PLATE	BRASS	1	Ag PLATED	4	SPRING PLATE	BRASS	1	Ag PLATED
1	FRAME	NYLON	1		2	COVER	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: MICRO-PHONE JACK

RATING: DC 30V 0.3A

MODEL NO: PJ-64044C

CONTACT RESISTANCE: 50mΩ max.

INSULATION RESISTANCE: 100MΩ at 500V DC

TOLERANCE UNIT: MM DWN. *hoo*

WITHSTAND VOLTAGE: AC 500V for 1 minute

UP TO 1.0:±0.1 SCALE: 2:1

OPERATION FORCE: REFER ATTACH SPECIFICATION

1.0 TO 10.0:±0.2 VERSION: 02

SWITCHING LIFE: 5k cycle min.

OVER 10.0:±0.3 DRWG NO: APPD. *hoo*

