

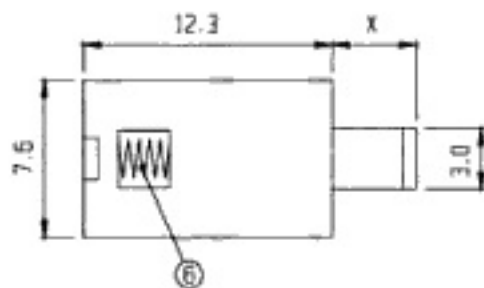
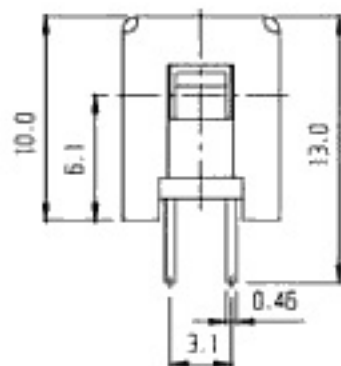


Non-shorting
shorting

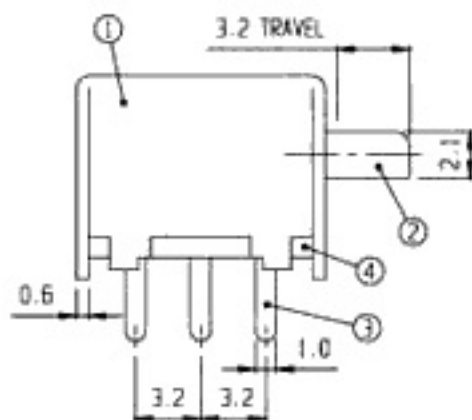

RoHS
Compliance

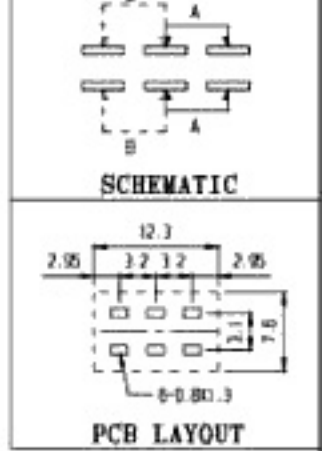

| | | | | | | | | | |
|----|----------|----------|-----|-----------|----|---------------|--------------|-----|---------|
| 5 | CONTACT | P B S | 2 | Ag PLATED | 6 | SPRING | STEEL WIRE | 1 | |
| 3 | TERMINAL | BRASS | 6 | Ag PLATED | 4 | TERMINAL BASE | PERNOL RESIN | 1 | NATURAL |
| 1 | FRAME | SPCC | 1 | Ni PLATED | 2 | KNOB | P O M | 1 | 3-9mm |
| NO | PART | MATERIAL | QTY | REMARKS | NO | PART | MATERIAL | QTY | REMARKS |

ISSUED SPECIFICATION TITLE: PUSH SLIDE SWITCH (2P2T) (UNLOCK)

RATING: DC 30V 0.3A MODEL NO: PS-22F15

| | | | | | |
|---------------------------------|---|------------------|-------------|--------|------------|
| | CONTACT RESISTANCE: 30mΩ max. | TOLERANCE | UNIT: MM | DWN. | <i>hoo</i> |
| | INSULATION RESISTANCE: 500MΩ at 500V DC | UP TO 1.0:±0.1 | SCALE: 3:1 | CHK'D. | <i>hoo</i> |
| | WITHSTAND VOLTAGE: AC 500V for 1 minute. | 1.0 TO 10.0:±0.2 | VERSION: 01 | APPD. | <i>hoo</i> |
| | OPERATION FORCE: REFER ATTACH SPECIFICATION | OVER 10.0:±0.3 | DRWG NO: | | |
| SWITCHING LIFE: 10K cycles min. | | | | | |