



Non shorting





SCHEMATIC



PCB LAYOUT

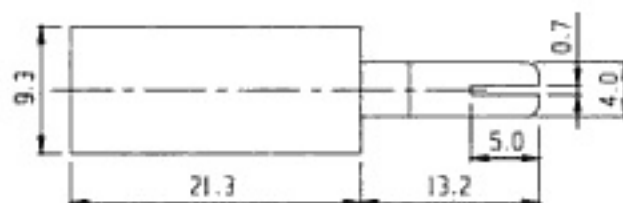

RoHS Compliance

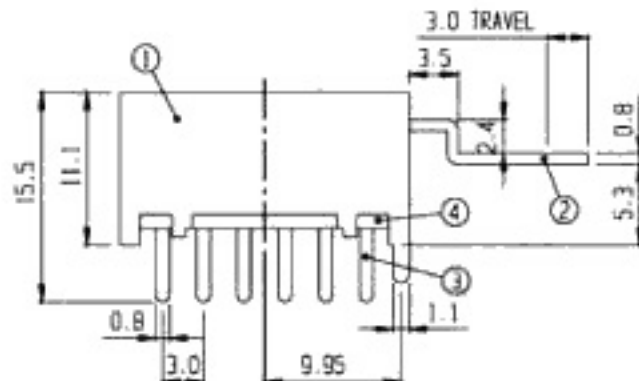

5	CONTACT	P B S	4	Ag PLATED	6	SPRING	STKEL WIRE	1	
3	TERMINAL	BRASS	12	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	POM+SPCC	1	M13
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: PUSH SLIDE SWITCH (4P2T)
(UNLOCK)

RATING: DC 30V 0.3A

CONTACT RESISTANCE: 30mΩ max.

INSULATION RESISTANCE: 500MΩ at 500V DC

WITHSTAND VOLTAGE: AC 500V for 1 minute

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 10K cycles min.

MODEL NO: PS-42F02

TOLERANCE UNIT: MM DWN. *hw*

UP TO 1.0:±0.1 SCALE: 2:1 CHK'D. *hw*

1.0 TO 10.0:±0.2 VERSION: 01

OVER 10.0:±0.3 DRWG NO: APPD. *hw*

