


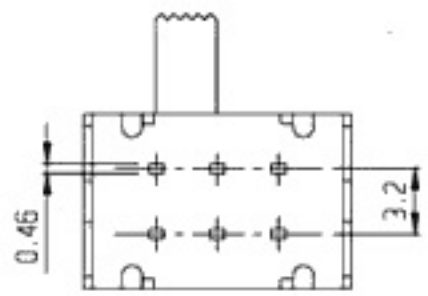


SCHMATIC

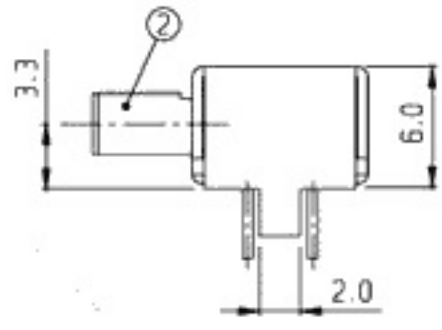

PCB LAYOUT

RoHS Compliance

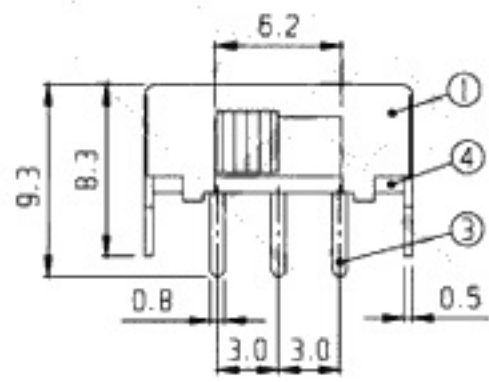

5	CONTACT	BRASS	2	Ag PLATED	6	SPRING	STEEL WIRE	2	
3	TERMINAL	BRASS	6	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	EG 3-13
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: SIDE KNOB SLIDE SWITCH (2P2T)

RATING: DC 30V 0.3A  
 CONTACT RESISTANCE: 30mΩ max.

MODEL NO: SK-22F18 (EG)

INSULATION RESISTANCE: 500MΩ at 500V DC

TOLERANCE UNIT: MM DWN. *hoo*

WITHSTAND VOLTAGE: AC 500V for 1 minute

UP TO 1.0:±0.1 SCALE: 3:1

OPERATION FORCE: REFER ATTACH SPECIFICATION

1.0 TO 10.0:±0.2 VERSION: 01

SWITCHING LIFE: 10K cycles min.

OVER 10.0:±0.3 DRWG NO: APPD. *[Signature]*

