




RoHS Compliance



SCHEMATIC

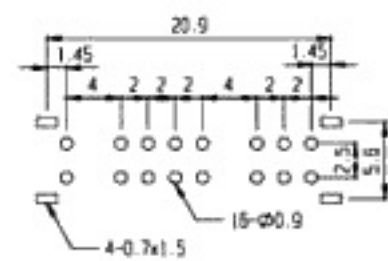

PCB LAYOUT

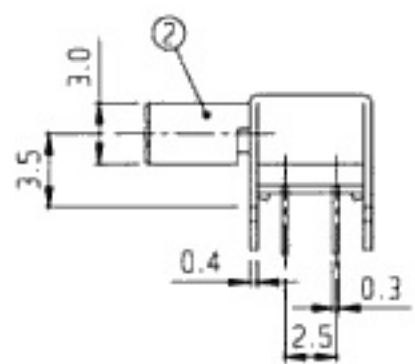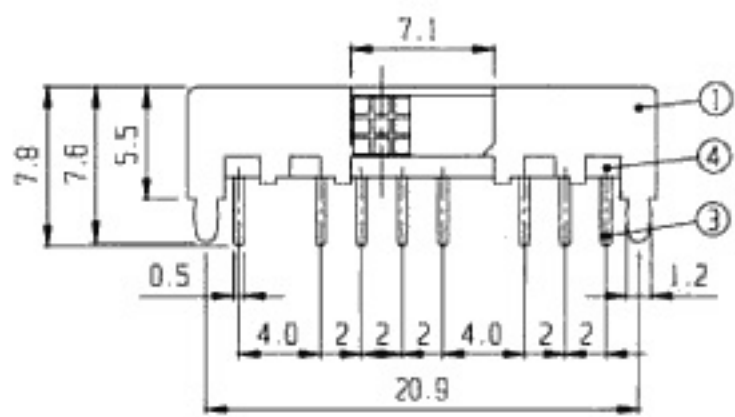

5	CONTACT	P B S	4	Ag PLATED	6	SPRING PLATE	P B S	1	
3	TERMINAL	BRASS	16	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P O M	1	PG 3-9
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED SPECIFICATION TITLE: SIDE KNOB SLIDE SWITCH (4P3T)

RATING: DC 30V 0.5A MODEL NO: SK-43D05 ( PG )

CONTACT RESISTANCE: 30mΩ max. TOLERANCE UNIT: MM DWN. *hro*

INSULATION RESISTANCE: 500MΩ at 500V DC UP TO 1.0:±0.1 SCALE: 3:1 CHK'D. *hro*

WITHSTAND VOLTAGE: AC 500V for 1 minute 1.0 TO 10.0:±0.2 VERSION: 02 APPD. *hro*

OPERATION FORCE: REFER ATTACH SPECIFICATION OVER 10.0:±0.3 DRWG NO: *hro*

SWITCHING LIFE: 10K cycles min. DRWG NO: *hro*

