


NON-SHORTING





SCHEMATIC

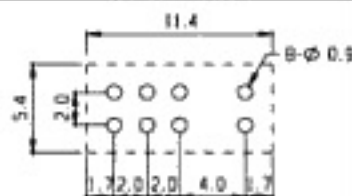

PCB LAYOUT

RoHS Compliance

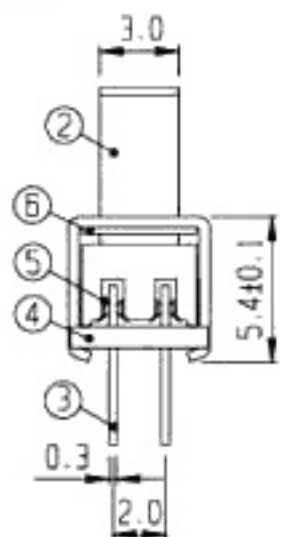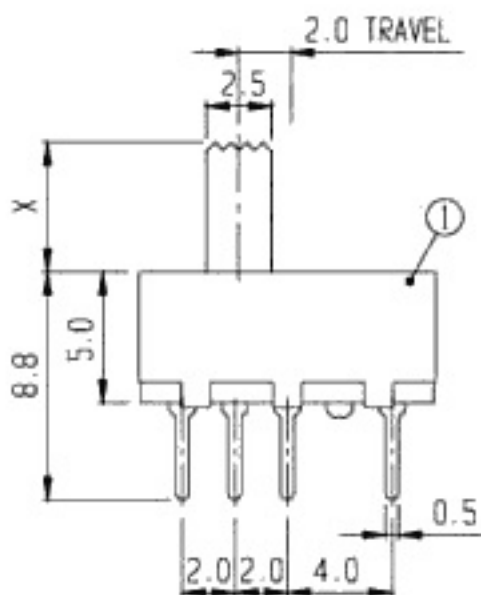

5	CONTACT	P B S	2	Ag PLATED	6	SPRING PLATE	S U S	1	
3	TERMINAL	BRASS	8	Ag PLATED	4	TERMINAL BASE	PHENOL RESIN	1	NATURAL
1	FRAME	S P C C	1	Ni PLATED	2	KNOB	P B T	1	EG 2.5-10
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED	SPECIFICATION	TITLE: SLIDE SWITCH (2P3T)
--------	---------------	----------------------------

	RATING: DC 30V 0.3A	MODEL NO: SS-23D19 (EG)
	CONTACT RESISTANCE: 30mΩ max.	
	INSULATION RESISTANCE: 500MΩ at 500V DC	TOLERANCE UNIT: MM
	WITHSTAND VOLTAGE: AC 500V for 1 minute	UP TO 1.0:±0.1 SCALE: 4:1
	OPERATION FORCE: REFR ATTACH SPECIFICATION	1.0 TO 10.0:±0.2 VERSION: 01

SWITCHING LIFE: 10K cycles min.	OVER 10.0:±0.3	DRWG NO:	DWN. <i>hoo</i>
			CHK'D. <i>per</i>
			APPD. <i>[Signature]</i>