





MATING PLUG

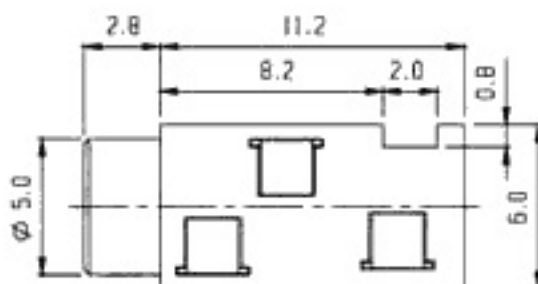


SCHEMATIC



P.C.B. LAYOUT

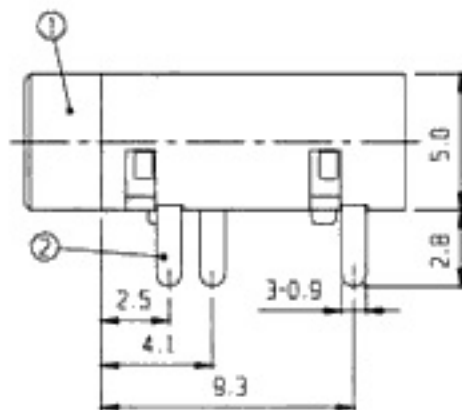

RoHS
Compliance

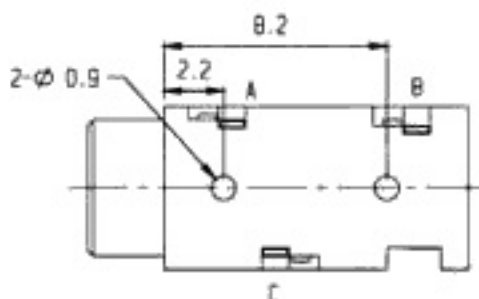

1	FRAME	P B T	1		2	TERMINAL	P B S	3	Ag PLATED
NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: 3.5mm STERED JACK



RATING: DC 30V 0.3A
 CONTACT RESISTANCE: 50mΩ max.
 INSULATION RESISTANCE: 100MΩ AT 500V DC
 WITHSTAND VOLTAGE: AC 500V for 1 minute
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 5K cycles min.

MODEL NO: ST-3533

TOLERANCE UNIT: MM
 UP TO 1.0:±0.1
 1.0 TO 10.0:±0.2
 OVER 10.0:±0.3
 SCALE: 4:1
 VERSION: 03
 DRWG NO:

DWN.
 CHK'D.
 APPD.