


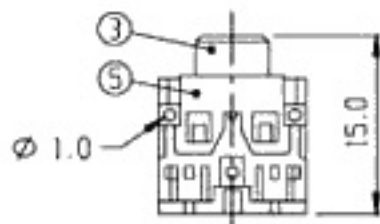


SCHEMATIC



PCB LAYOUT

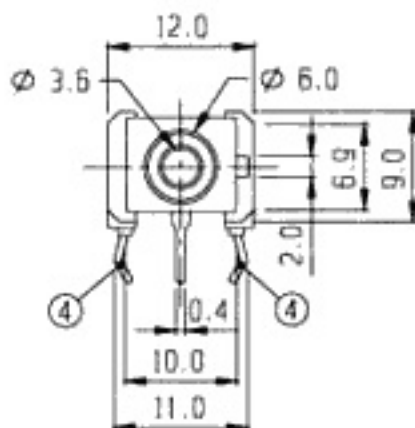

RoHS
Compliance

NO.	PART	MATERIAL	QTY	REMARKS	NO.	PART	MATERIAL	QTY	REMARKS
5	TERMINAL	BRASS	1	Ag PLATED					
3	SHEATH	BRASS	1	Ni PLATED	4	CONTACT	PBS-SH	2	Ag PLATED
1	FRAME	P B T	1		2	FRAME	P B T	1	

ISSUED

SPECIFICATION

TITLE: 3.5mm STEREO JACK



RATING:	DC 30V 0.3A
CONTACT RESISTANCE:	50mΩ max.
INSULATION RESISTANCE:	100MΩ AT 500V DC
WITHSTAND VOLTAGE:	AC 500V for 1 minute
OPERATION FORCE:	REFER ATTACH SPECIFICATION
SWITCHING LIFE:	5K cycles(15-18 cycles/min unloading)

MODEL NO: ST-3536

TOLERANCE	UNIT: MM	DWN.	<i>h</i>
UP TO 1.0: ±0.1	SCALE: 1.5:1	CHK'D.	<i>m</i>
1.0 TO 10.0: ±0.2	VERSION: 1	APPD.	<i>[Signature]</i>
OVER 10.0: ±0.3	DRWG NO:		