





RoHS  
Compliance



SCHMATIC



PCB LAYOUT

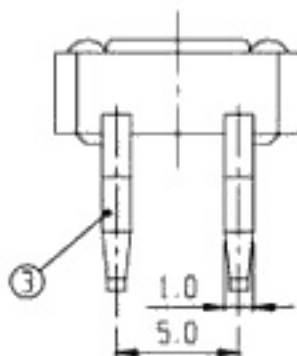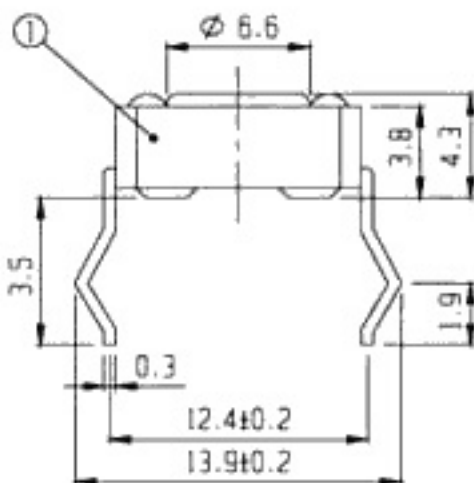

5	CONTACT	P B S	1	Ag PLATED					
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	POLYESTER FILM	1	
1	FRAME	NYLON	1		2	KNOB	NYLON	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH (01A)



RATING: DC 12V 50mA  
 CONTACT RESISTANCE: 100mΩ Max.  
 INSULATION RESISTANCE: 100MΩ at 500V DC  
 WITHSTAND VOLTAGE: AC 250V for 1 minute.  
 OPERATION FORCE: REFER ATTACH SPECIFICATION  
 SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-00121-00

TOLERANCE UNIT: MM  
 UP TO 1.0:±0.1 SCALE: 4:1  
 1.0 TO 10.0:±0.2 VERSION: 01  
 OVER 10.0:±0.3 DRWG NO:

DWN. *hwo*  
 CHK'D. *m*  
 APPD. *[Signature]*