




SCHEMATIC



PCB LAYOUT

RoHS  
Compliance

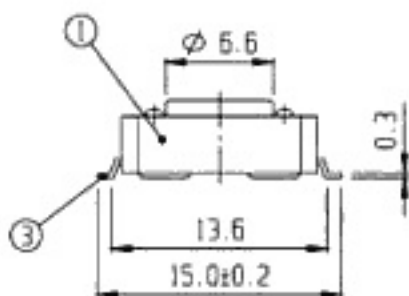

|    |          |          |     |           |    |             |          |             |         |
|----|----------|----------|-----|-----------|----|-------------|----------|-------------|---------|
| 5  | CONTACT  | P B S    | 1   | Ag PLATED |    |             |          |             |         |
| 3  | TERMINAL | BRASS    | 4   | Ag PLATED | 4  | COVER BOARD | SPCC     | 1 Ni PLATED |         |
| 1  | FRAME    | NYLON 46 | 1   |           | 2  | KNOB        | NYLON 46 | 1           |         |
| NO | PART     | MATERIAL | QTY | REMARKS   | NO | PART        | MATERIAL | QTY         | REMARKS |

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA

CONTACT RESISTANCE: 100mΩ Max.

INSULATION RESISTANCE: 100MΩ at 500V DC

WITHSTAND VOLTAGE: AC 250V for 1 minute.

OPERATION FORCE: REFER ATTACH SPECIFICATION

SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-06121-00

TOLERANCE UNIT: MM

UP TO 1.0:±0.1 SCALE: 2.5:1

1.0 TO 10.0:±0.2 VERSION: 01

OVER 10.0:±0.3 DRWG NO:

DWN. *hoo*

CHK'D. *mn*

APPD. *[Signature]*

