




SCHEMATIC

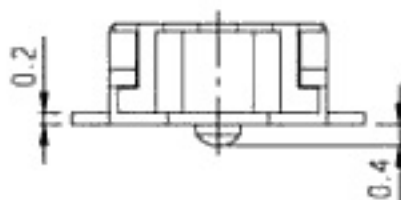

PCB LAYOUT

RoHS
Compliance

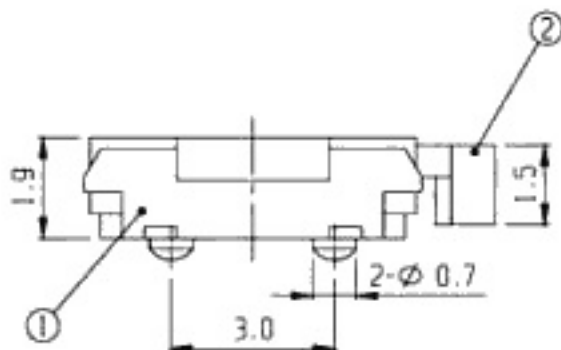

5	CONTACT	S U S	1		6	DUST COVER	POLYIMIDE	1	
3	TERMINAL	BRASS	4	Ag PLATED	4	COVER BOARD	S U S	1	
1	FRAME	NYLON 46	1		2	KNOB	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH

RATING: DC 12V 50mA
 CONTACT RESISTANCE: 100mΩ Max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 250V for 1 minute.
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 50k Cycles Min.

MODEL NO: TC-26401

TOLERANCE	UNIT: MM	DWN.	<i>hro</i>
UP TO 1.0:±0.1	SCALE: 8:1	CHK'D.	<i>hro</i>
1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>[Signature]</i>
OVER 10.0:±0.3	DRWG NO:		

