

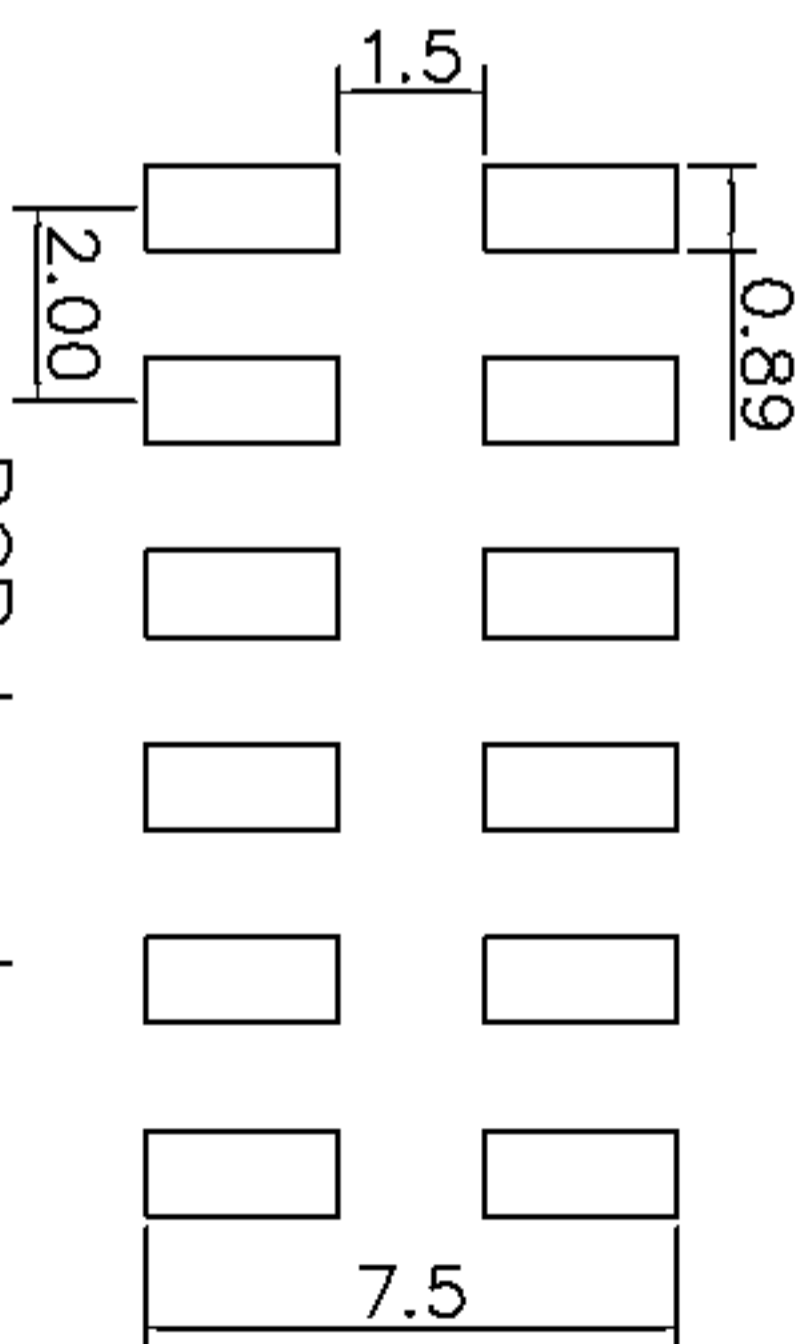


	A			
		新版图	/	2012.05.23
				L2M

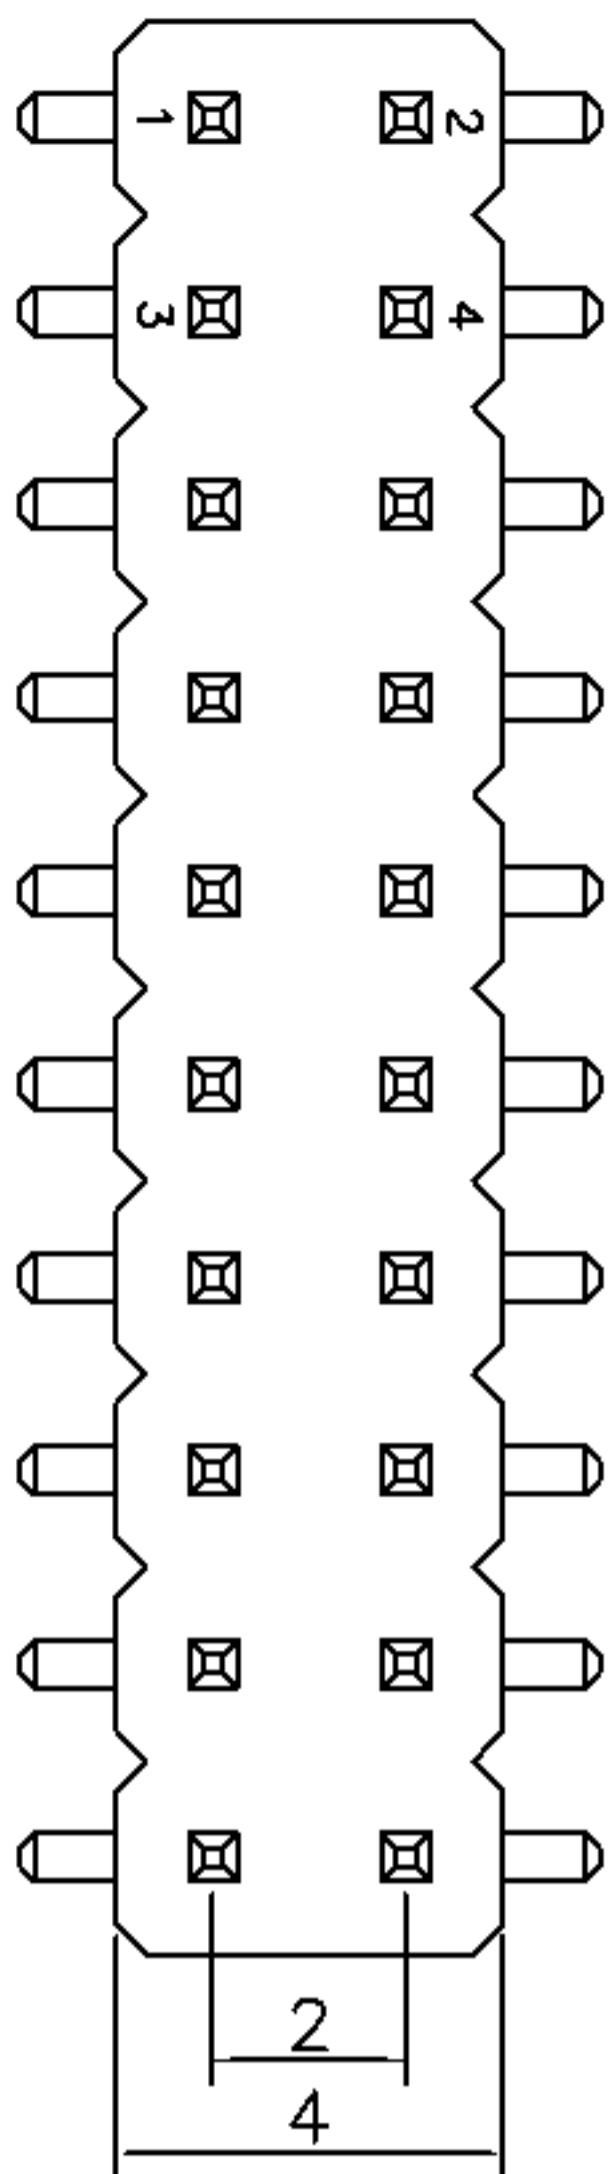

PCB Layout

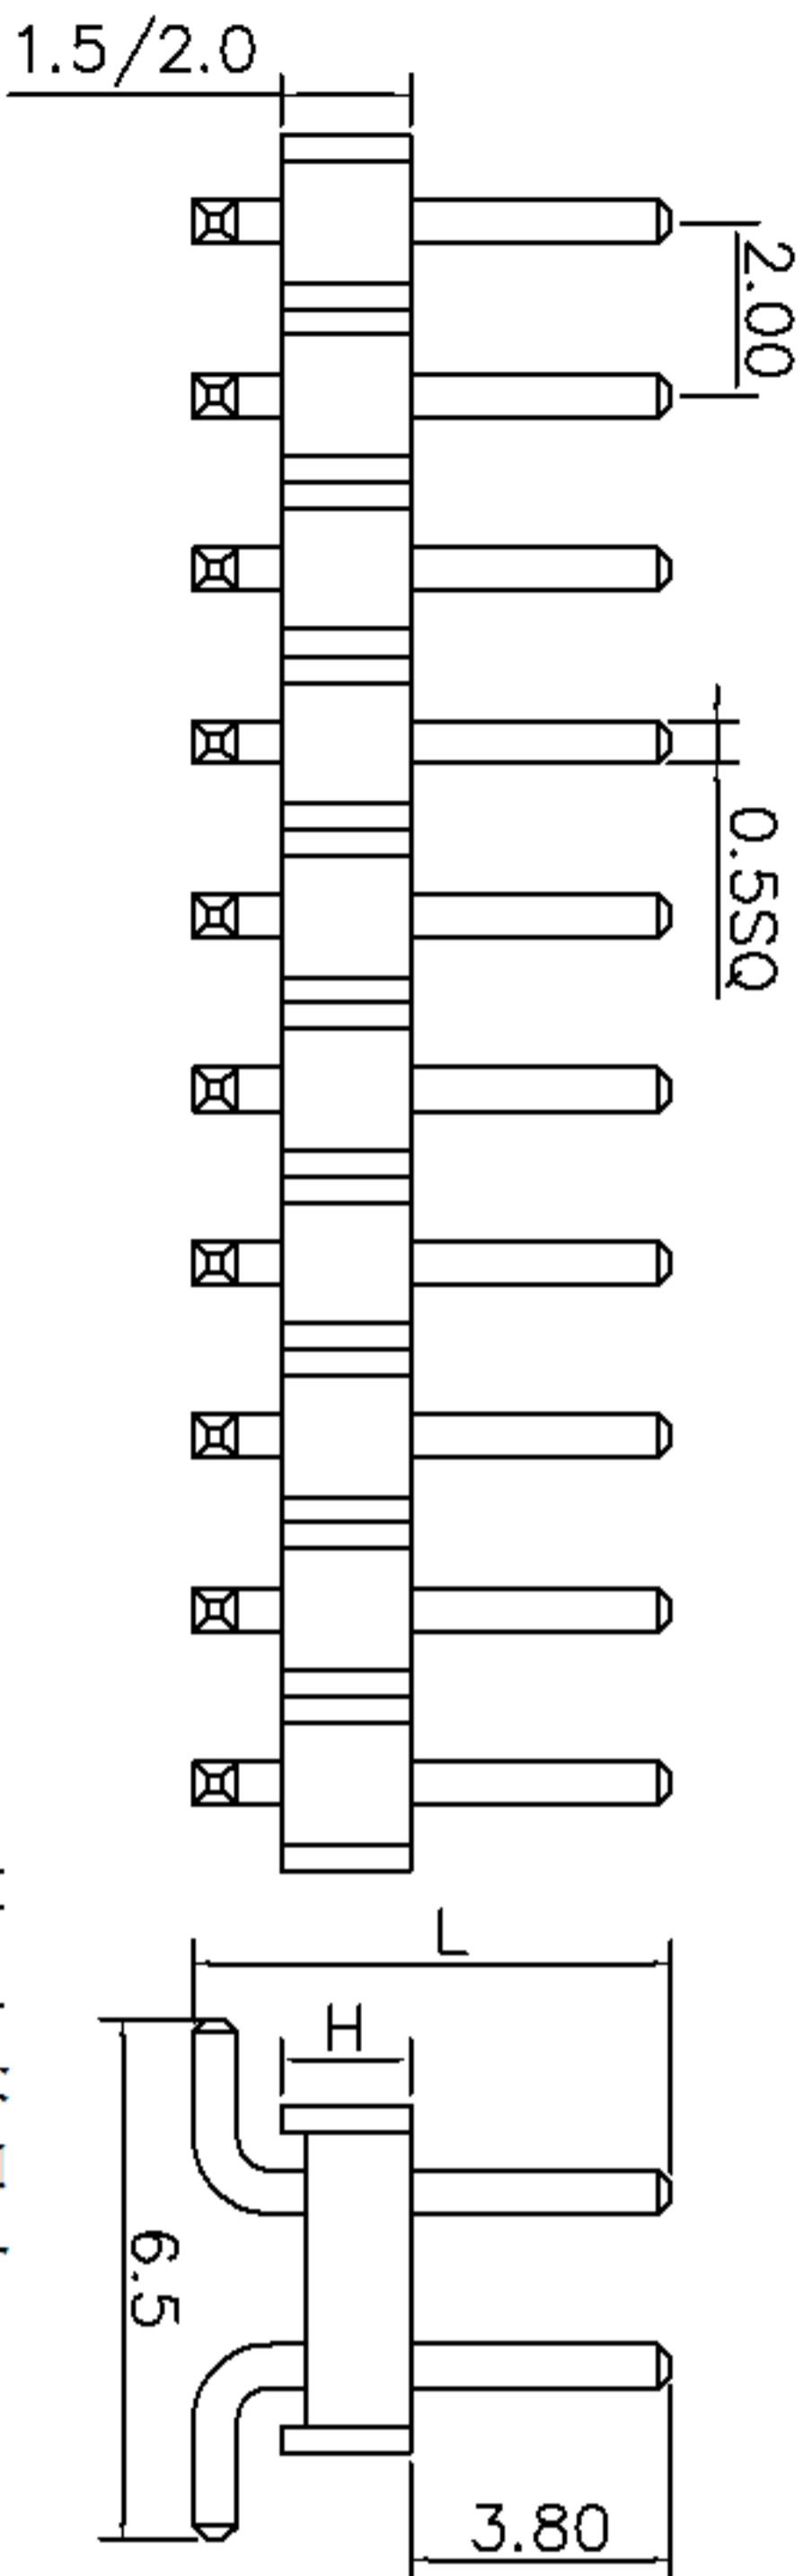

H、L的尺寸
可依客户要求订做

Technical Data:
 Material:
 Contact Material: Brass
 Insulator Material: PA66+30%GF
 Electrical:
 Current rating: 1.5Amps/Contact max.
 Contact resistance: ≤ 20 mohms/Contact
 Insulation resistance: ≥ 1000 Mohms at V=100V
 Withstanding Voltage: 450V AC/Minute
 Mechanical:
 Operating Temperature: Gold plated: -55°C~105°C
 Tin plated: -40°C~105°C
 Soldering Temperature: 260°C 10s Max.

1101-200M12XX-H-L
 2.00PIN距单塑胶双
 排SMT排针系列
 每排PIN数
 塑高
 总高

TOLERANCE		ANGLE
TOL		
ON		
.XXX±	0.05	
.XX⊥	0.15	1°
X±	0.20	2°
X.±	0.30	

DRAWN	DATE	CHECKED	DATE
YSH	2012.05.23		
CLIENT APPROVED	DATE		



武汉宇恒电子有限公司
 WUHAN YUHENG ELECTRONIC CO., LTD

TITLE:
 排针系列-2.00 PIN距-双排-单塑形-立式贴片

RFQ NO	
CLIENT P/N	
UNIT: mm	SCALE: free
FILE NO.: YH20120602A014	