


REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.07.04	HUANG	KEVIN

NOTES

- 1: MATERIAL: SHELL: STEEL
HOUSING: PBT+30%G.F, BLACK, UL94V-0
CONTACT: PHOSPHOR BRONZE AND BRASS
- 2: FINISH: SHELL: NICKEL PLATING
CONTACT PLATING: GOLD PLATING
- 3: SPECIFICATION: CURRENT RATING: 40A
VOLTAGE RATING: 300V
CONTACT RESISTANCE: 10mΩ
WITHSTANDING VOLTAGE: 1000V
INSULATION RESISTANCE: 5000MΩ
OPERATING TEMPERATURE: -55°C~105°C

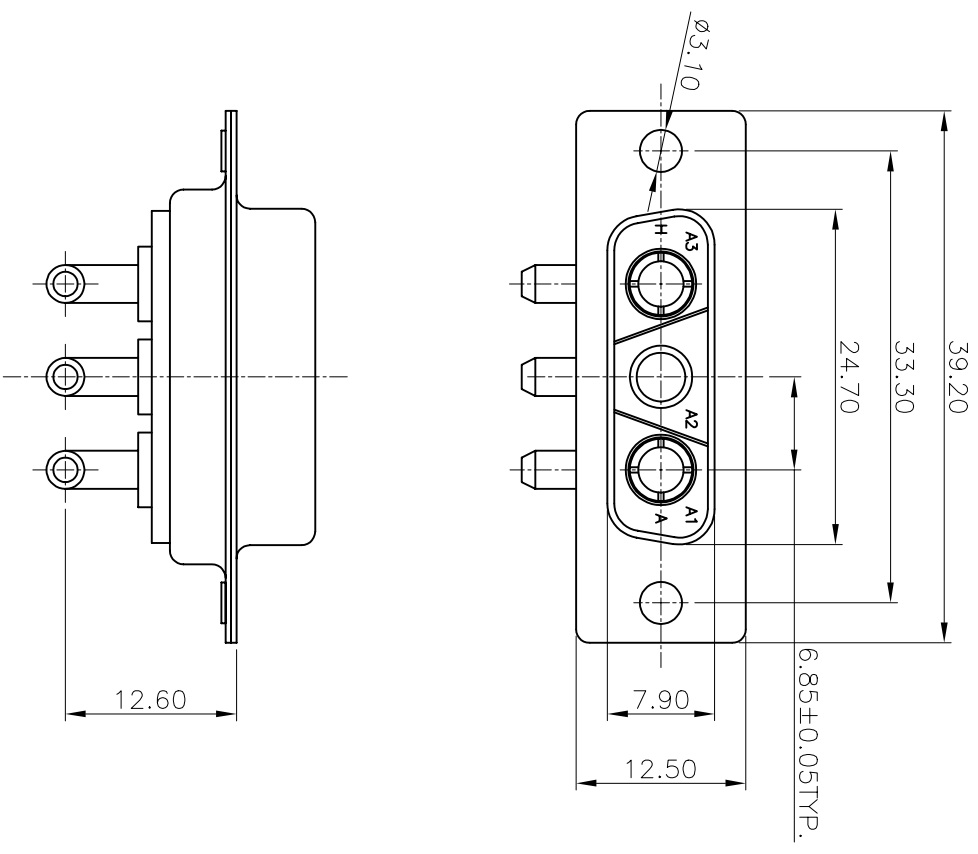

-TOLERANCES-		UNLESS OTHERWISE SPECIFIED	
X.X	± 0.30	X.X°	$\pm 3^\circ$
X.XX	± 0.15	X.XX°	$\pm 1^\circ$
X.XXX	± 0.10	X.XXX°	$\pm 0.5^\circ$

SYMBOL	DESCRIPTION
	THREAD
	TAPER

APPD:	KEVIN	PRODUCT NO:	134-003FPXMK02	TITLE:	3V3 两母一公 折弯成品			
CHECK:	TENA	DATE:	2007.07.04	SCALE:	UNIT:	TYPE:	PAGE:	
DRAW:	HUAN	FREE:	MM		Y		1/1	