
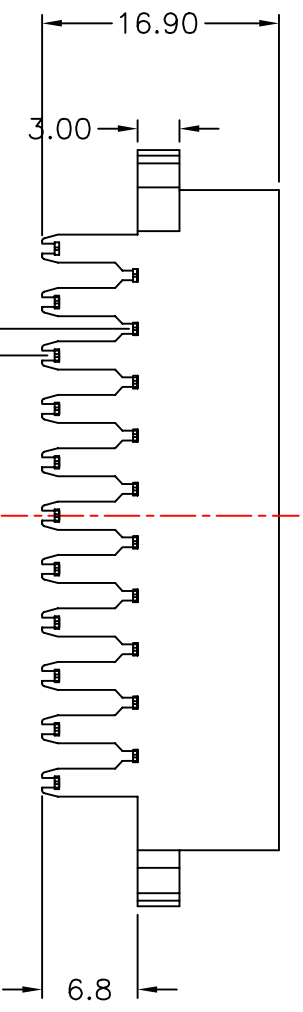
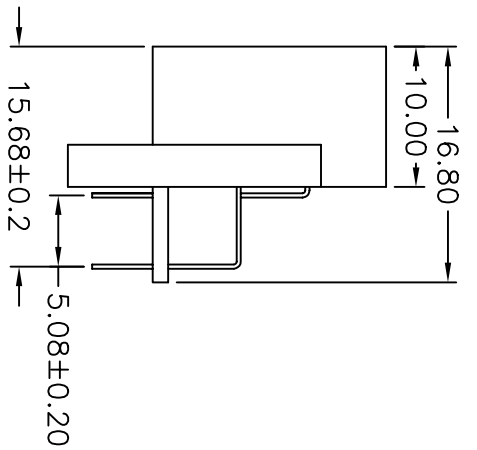


REV.	NOTES	DATE
A	RELEASED	2004/06/08
B	① 0.90 改0.90±0.05	2004/06/23

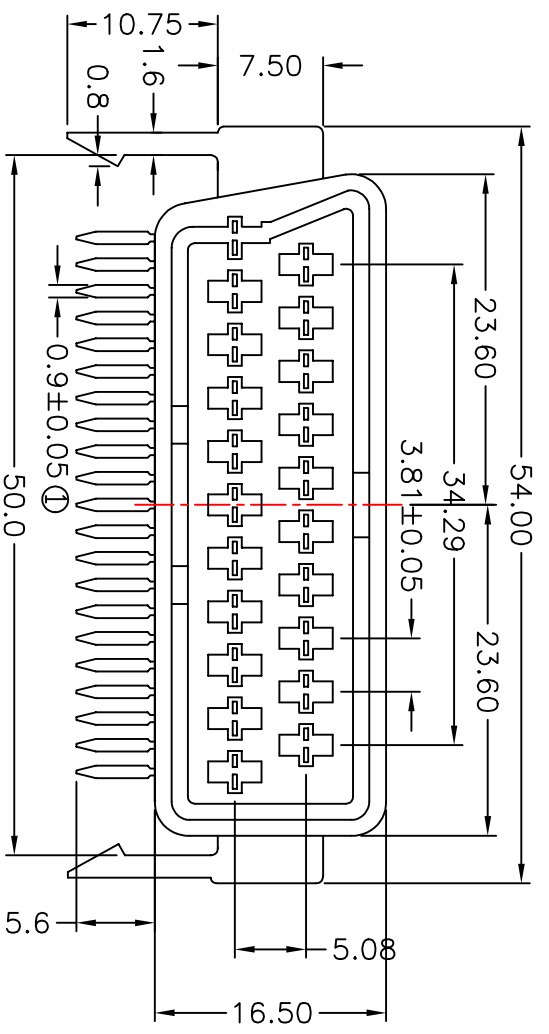

- NOTES:
- MATERIALS
    - Insulator: Pc
    - Contact: Brass
    - Contact Plating: Tin Plated
  - SPECIFICATIONS
    - Current Rating: 5Amp
    - Dielectric Strength: 1000V AC for one minute
    - Insulator Resistance: 5000MΩ Min.(at 500V DC)
    - Operation Temperature: -55° C to +105° C

DIMENSIONS TOLERANCE		METRIC	
0 = ±.30		0 = ±.30	
.00 = ±.20		.00 = ±.20	
.0000 = ±.XXX		.0000 = ±.XXX	
ANG. = ±2°		ANG. = ±2°	

單位 (UNITS)	mm
數量 (QTY)	N/A
材料 (MTR'L)	SEE NOTE
處理 (FINISH)	SEE NOTE

圖名 (NAME)	
料號 (PART NUMBER)	ASC+0380-40C3
圖號 (DRAW NUMBER)	RASC038040C3
圖檔 (FILE NAME .DWG)	E:GCT/A/SC/03

比例 (SCALE)	圖紙 (SHEET)	頁次 (SHEET)	版次 (REV.)
1/1	A4	1	B

PCB LAYOUT

