
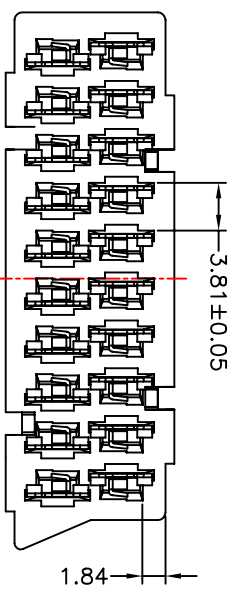
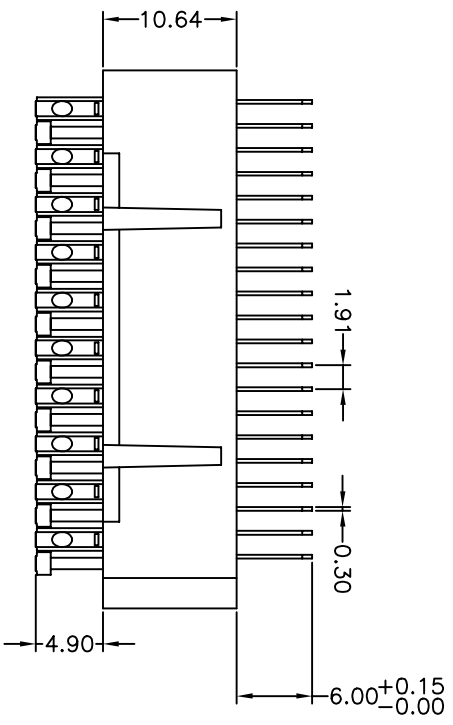
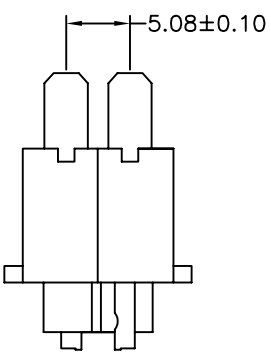


REV.	NOTES	DATE
A	RELEASED	2006/10/20
B	增加料號,ASC+0200-10B	2006/11/17
C	端子阻抗由25Ω代替30Ω	2006/12/08

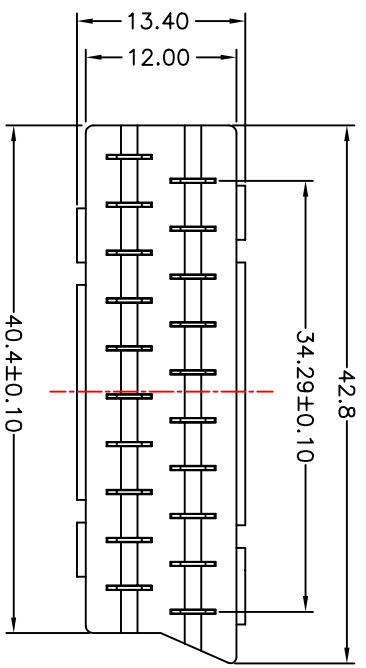

- NOTES:
- MATERIALS
 - INSULATOR: P.B.T+30% GLASS FIBER(U.L94V-0).
 - CONTACT: BRASS 0.3T
 - SPECIFICATIONS
 - CURRENT RATING: 3.0 AMP
 - DIELECTRIC STRENGTH: 1000V AC FOR ONE MINUTE
 - INSULATOR RESISTANCE: 1000M OHMS MIN
 - CONTACT RESISTANCE: 25m OHMS MAX
 - OPERATION TEMPERATURE: -55 C TO +105 C

Part No	Plating
ASC+0200-40B	TIN PLATED
ASC+0200-10B	GOLD PLATED

DIMENSIONS TOLERANCE		圖名 (NAME)	
METRIC	0 = ±.30	料號 (PART NUMBER)	ASC+0200-40B
	.00 = ±.20	圖號 (DRAW NUMBER)	RASC020040B
	.000 = ±.XXX	圖檔 (FILE NAME .DWG)	E:GCT/ASC/02
	.0000 = ±.	比例 (SCALE)	1/1
	ANG. = ±2°	圖紙 (SHEET)	A4
		頁次 (SHEET)	1
		版本 (REV.)	C
單位 (UNITS)		圖名 (NAME)	成型端PIN鍍錫 無毒
數量 (QTY)		料號 (PART NUMBER)	ASC+0200-40B
材料 (MATERIAL)		圖號 (DRAW NUMBER)	RASC020040B
處理 (FINISH)		圖檔 (FILE NAME .DWG)	E:GCT/ASC/02
繪圖 (DRAW)		比例 (SCALE)	1/1
設計 (DE'N)		圖紙 (SHEET)	A4
審核 (CHK)		頁次 (SHEET)	1
核准 (APP' D)		版本 (REV.)	C