


# 5X6 IDC 线缆连接器 1811 系列

5 x 6 IDC cable connector 1811 Series

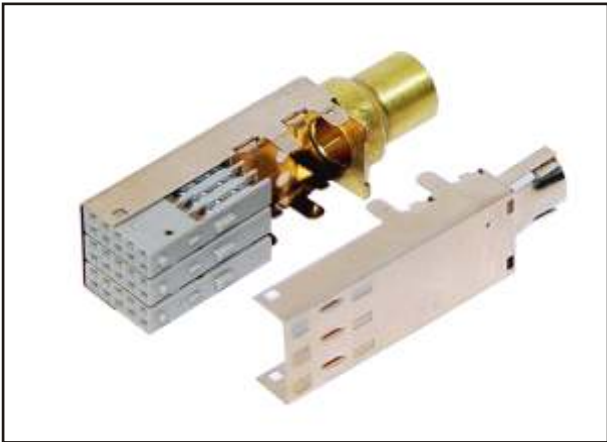

### Features

- 5 rows with 30 contacts
- Grid at 2mm spacing
- Be derived from IEC 61076-4-104

### Electrical

- Current rating: 1.5A at 20 , 1A at 70
- Contact resistance: 20m
- Insulation resistance: 10000 M
- Dielectric withstand voltage: 1000V.r.m.s.

### Mechanical

- Insertion force: 0.75N/pin
- Extraction force: 0.15N/pin
- Operating temperature: -55 ~ +125

### 特点

- 5排6列的线缆连接器
- 2mm 网格间距
- 源自 IEC 61076-4-104标准


### 电气特性

- 额定电流: 1.5A at 20 , 1A at 70
- 接触电阻: 20 m
- 绝缘电阻: 10000 M
- 耐电压: 1000 V.r.m.s.

### 机械特性

- 插入力: 0.75 N/pin
- 拔出力: 0.15 N/pin
- 适用环境: -55 ~ +125

1811-506-XX-1

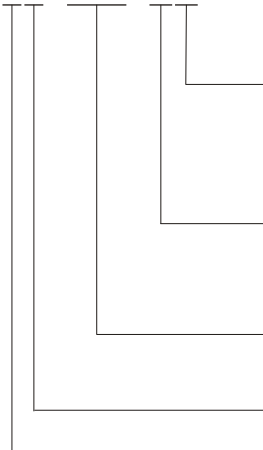

#### 电镀等级 (Grade of the plating)

代码(code)	触点镀层(Contacts plating)
2	GLASS I
3	GLASS II
4	GLASS III

#### 线规 ( Wire gauge )

代码(code)	线规号(Wire gauge)
1	AWG24/26
2	AWG28/30

孔位分布为5排6列(The bore distributes of Bac to 5 rows x 6 lines)

屏蔽 (Shielding)

IDC系列代码 ( IDC Series code )

