
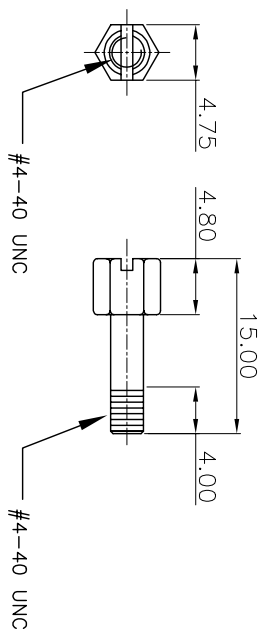
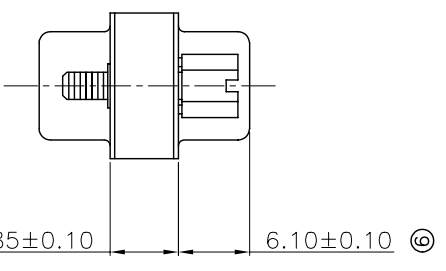



| REV | MODIFICATION | DATE | DRAW | APPROVE |
|-----|--------------|------------|-------|---------|
| A | NEW DWG | 2007.08.05 | HUANG | KEVIN |
| | | | | |
| | | | | |

NOTES
 MARK \otimes IS MAJOR TEST DIMENSION
 1: MATERIAL:
 HOUSING: P BT+30%G.F, BLOVE, UL94V-0
 CONTACT: BRASS
 2: FINISH:
 CONTACT PLATING: GOLD PLATED
 3: SPECIFICATION:
 CURRENT RATING: 5A
 WITHSTANDING VOLTAGE: AC 1000V 5s
 INSULATION RESISTANCE: 1000M Ω 500V DC
 OPERATING TEMPERATURE: -55C~105 °C

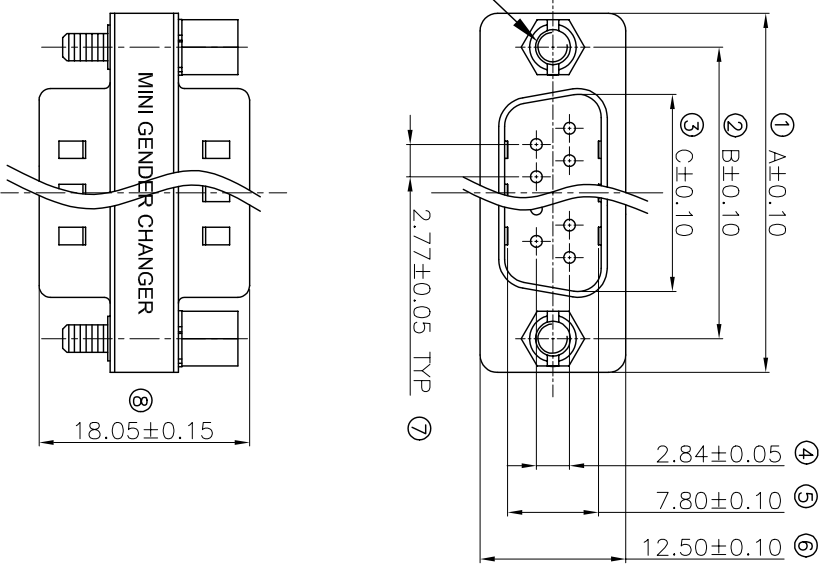

Screw specification

| PIN NO. | DIM A | DIM B | DIM C | P/N |
|---------|-------|-------|-------|-----------------|
| 9P | 30.80 | 24.99 | 16.92 | 182-009MBXPPB01 |
| 15P | 39.20 | 33.30 | 25.25 | 182-015MBXPPB01 |
| 25P | 53.05 | 47.04 | 38.96 | 182-025MBXPPB01 |

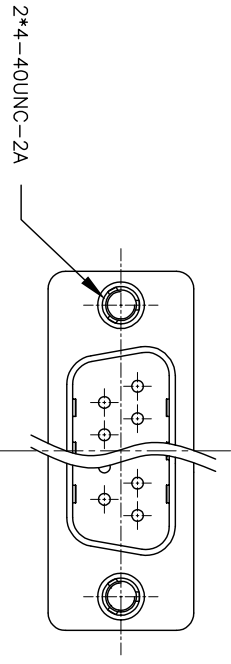

UNLESS OTHERWISE SPECIFIED
 公差參考表

| TITLE: | | 產品名稱 : | | DB 1.0 MALE 轉接頭 | |
|--------|-------|--------------|------------------|-----------------|------|
| APPD: | KEVIN | PRODUCT NO.: | 182-XXXXMBXPPB01 | | |
| CHECK: | TENA | DATE: | SCALE | UNIT | TYPE |
| DRAW: | HUANG | 2007.08.05 | FREE | MM | H |
| X.XXX | ±0.05 | X.XXX | ±0.5° | | |
| X.XX | ±0.15 | X.XX | ±1° | | |
| X.X | ±0.25 | X.X | ±3° | | |