


REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	2007.07.04	HUANG	KEVIN

NOTES

1: MATERIAL:
SHELL: STEEL
HOUSING: PBT+30%G.F, BLACK, UL94V-0
CONTACT: BRASS

2: FINISH:
SHELL: NICKEL PLATING
CONTACT PLATING: GOLD PLATING

3: SPECIFICATION:
CURRENT RATING: 40A
VOLTAGE RATING: 300V
CONTACT RESISTANCE: 10m Ω
WITHSTANDING VOLTAGE: AC 1000V 5s
INSULATION RESISTANCE: 5000M Ω 500V DC
OPERATING TEMPERATURE: -55°C~105°C

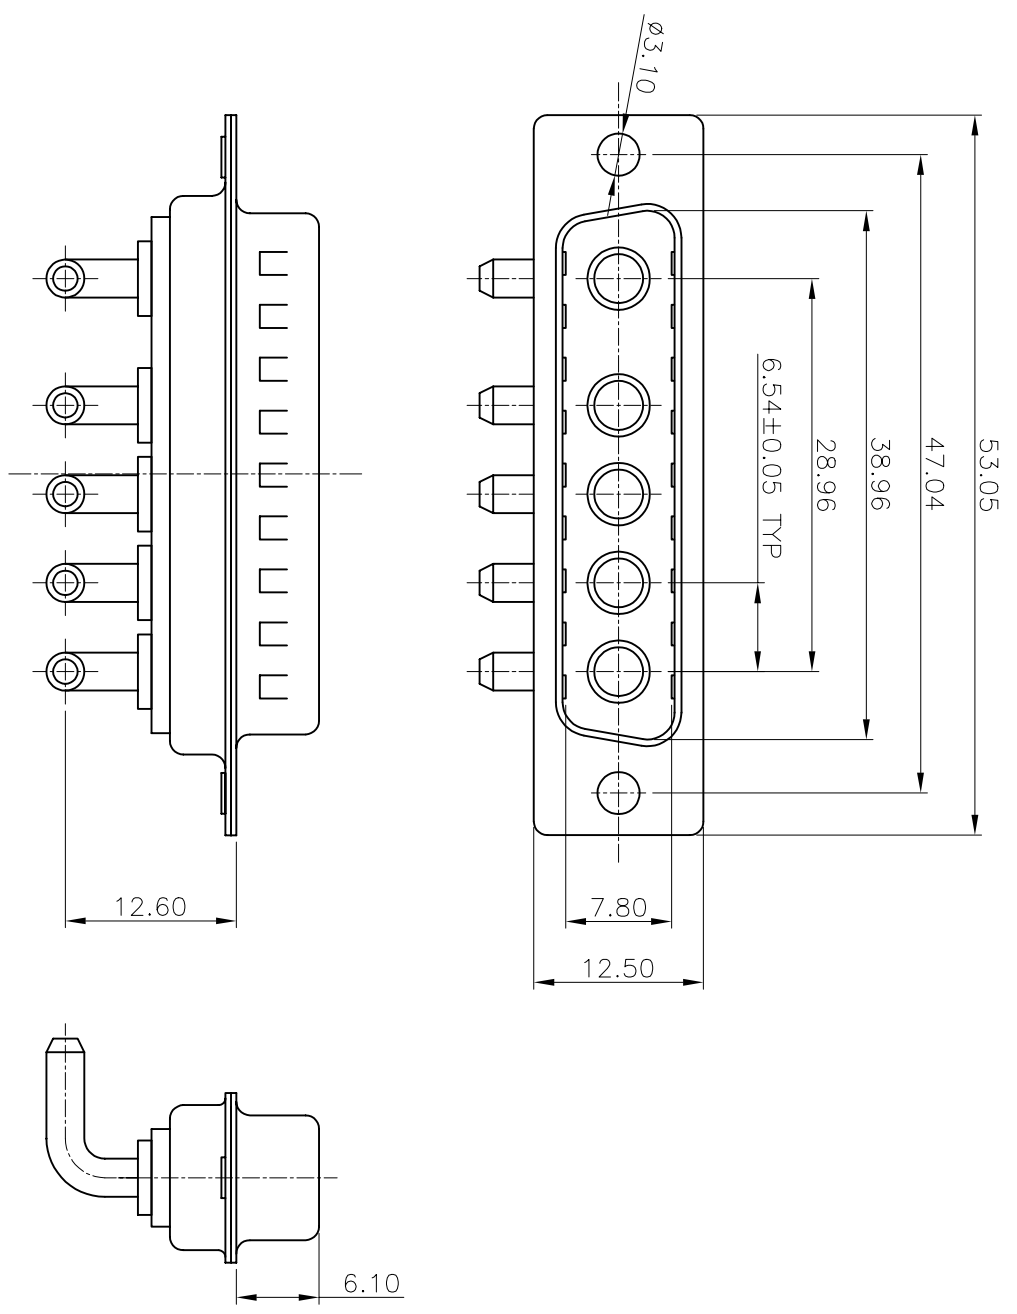

-TOLERANCES-		TITLE: 5W5 MALE 折弯成品	
UNLESS OTHERWISE SPECIFIED			
X.X	±0.30	X.X°	±3°
X.XX	±0.15	X.XX°	±1°
X.XXX	±0.10	X.XXX°	±0.5°

--	--

APPD: KEVIN	PRODUCT NO: 134-005MBXMK01				
CHECK: TENA	DATE	SCALE	UNIT	TYPE	PAGE
DRAW: HUANG	2007.07.04	FRBE	MM	Y	1/1