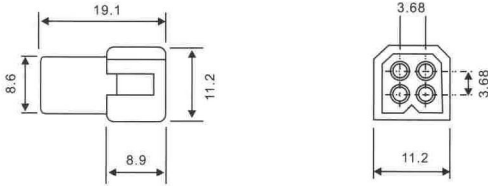
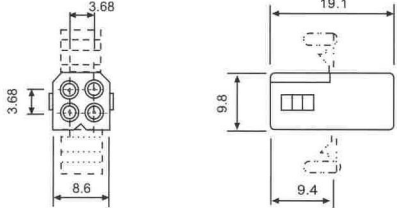
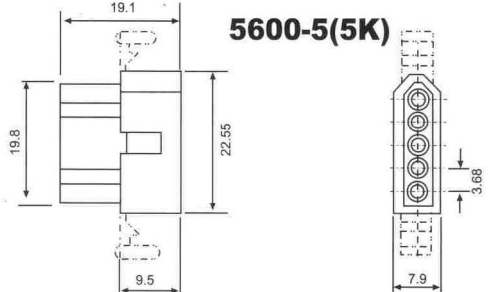
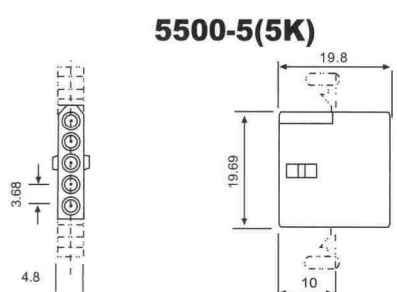
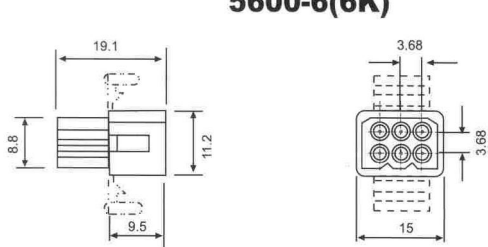
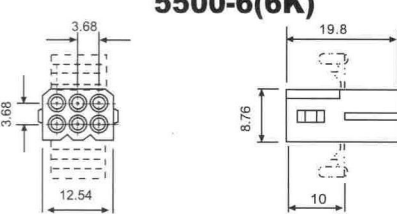
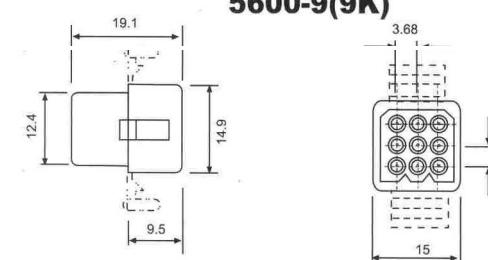
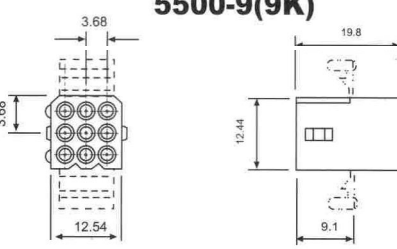
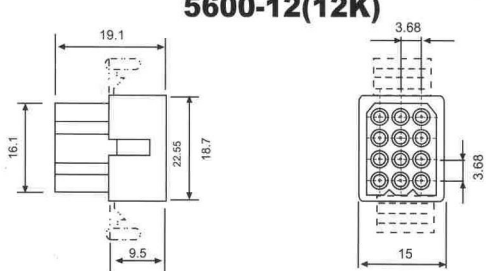
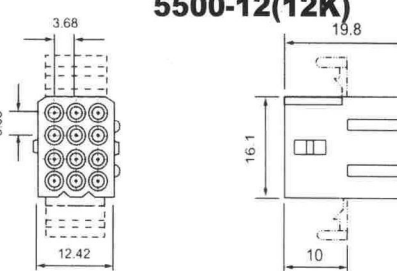
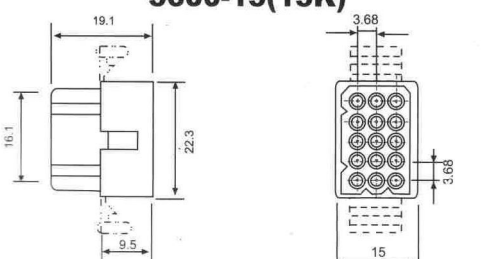


5500/5600 CONNECTOR

Features/Dimensions:

- Integrally molded polarization
- Nylon66 UL94V-2
- 1,2,3,4,5,8,9,12,15 circuits
- Friction lock
- Integrally molded mounting ears available
- Standard color: natural
- 0.145" (3.68mm) grid spacing*
- Strain relief for 15 circuit version.

CIR CUITS	MAX RATEC		DIMENSIONAL INFORMATION	
	AMP	VOLT- AGE	PLUG	RECETACLE
1	5A	250V	5600-1 	5500-1
2	5A	250V	5600-2(2K) 	5500-2(2K)
3	5A	250V	5600-3(3K) 	5500-3(3K)
4	5A	250V	5600-4(4K-1) 	5500-4(4K-1)

CIRCUITS	MAX RATE		DIMENSIONAL INFORMATION	
	AMP	VOLTAGE	PLUG	RECECTACLE
4	5A	250V	<p>5600-4(4K)</p> 	<p>5500-4(4K)</p> 
5	5A	250V	<p>5600-5(5K)</p> 	<p>5500-5(5K)</p> 
6	5A	250V	<p>5600-6(6K)</p> 	<p>5500-6(6K)</p> 
9	5A	250V	<p>5600-9(9K)</p> 	<p>5500-9(9K)</p> 
12	5A	250V	<p>5600-12(12K)</p> 	<p>5500-12(12K)</p> 
15	5A	250V	<p>5600-15(15K)</p> 	<p>5500-15(15K)</p> 