




SCHEMATIC

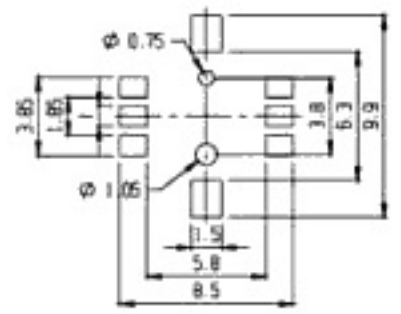

PCB LAYOUT

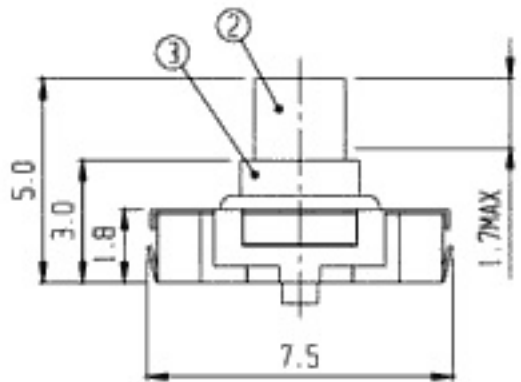

CENTER OF STEM ROTATION

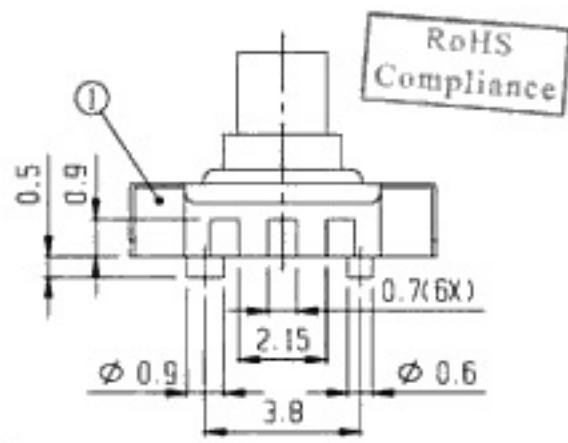

TRAVEL : 4-DIRECTION: 0.3mm, CENTER: 0.15mm

5	COVER BOARD	S U S	1		6	CONTACT	S U S	1	Ag PLATED
3	KNOB2	L C P	1		4	TERMINAL	BRASS	6	Ag PLATED
1	FRAME	NYLON 46	1		2	KNOB1	NYLON 46	1	
NO	PART	MATERIAL	QTY	REMARKS	NO	PART	MATERIAL	QTY	REMARKS

ISSUED

SPECIFICATION

TITLE: TACT SWITCH



RATING: DC 12V 50mA
 CONTACT RESISTANCE: 500mΩ Max.
 INSULATION RESISTANCE: 100MΩ at 500V DC
 WITHSTAND VOLTAGE: AC 250V for 1 minute.
 OPERATION FORCE: REFER ATTACH SPECIFICATION
 SWITCHING LIFE: 100k Cycles Min.

MODEL NO: TC-16311

TOLERANCE	UNIT: MM	DWN.	<i>hoo</i>
UP TO 1.0:±0.1	SCALE: 6:1	CHK'D.	<i>hoo</i>
1.0 TO 10.0:±0.2	VERSION: 02	APPD.	<i>hoo</i>
OVER 10.0:±0.3	DRWG NO:		