REV	MODIFICATION	DATE	DRAW	APPROVE
A	EN0704012	16-APR-07	YUKI	KEVIN

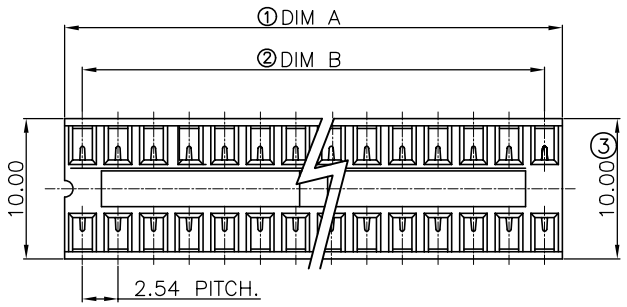

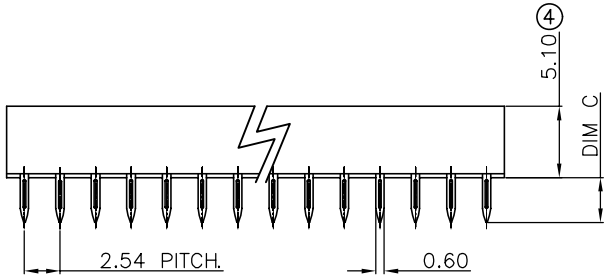



NOTES
MARK ⓧ IS MAJOR TEST DIMENSION
1:MATERIAL:
HOUSING: PBT+30%G.F, BLACK, UL94V-0
CONTACT: BRASS/PHOSPHOR BRONZE
2:FINISH:
CONTACT PLATING: TIN PLATED 80u"~120u"
3:SPECIFICATION:
CURRENT RATING: 1mA
WITHSTANDING VOLTAGE: AC 1000V 5s
INSULATION RESISTANCE: 1000MΩ 500V DC
OPERATING TEMPERATURE: -55°C~105°C
4:P/N: 10 3-XXX Z 7 T P K XX

10: IC SERIES
3: DIP 180°
XXX: PIN NO.
eg.: 32PIN=032
36PIN=036
Z: 无公母之分
A: PH1.778
7: PH2.54
T: CONTACT PLATING TIN
P: 冲制端子
K: PLASTIC COLOUR BLACK
XX:
01: 窄体无杠DIM C=3.2
02: 窄体无杠DIM C=2.8
03: 窄体有一杠DIM C=3.2
04: 窄体有一杠DIM C=2.8
05: 窄体有二杠DIM C=3.2
06: 窄体有二杠DIM C=2.8
07: 宽体无杠DIM C=3.2
08: 宽体无杠DIM C=2.8
09: 宽体有一杠DIM C=3.2
10: 宽体有一杠DIM C=2.8
11: 宽体有二杠DIM C=3.2
12: 宽体有二杠DIM C=2.8

材料名稱	材料料号	DIM A	DIM B	材料名稱	材料料号	DIM A	DIM B
IC-06P	103-006Z7TPKXX	7.62	5.08	IC-20P	103-020Z7TPKXX	25.40	22.86
IC-08P	103-008Z7TPKXX	10.16	7.62	IC-22P	103-022Z7TPKXX	27.94	25.40
IC-14P	103-014Z7TPKXX	17.78	15.24	IC-24P	103-024Z7TPKXX	30.48	27.94
IC-16P	103-016Z7TPKXX	20.32	17.78	IC-28P	103-028Z7TPKXX	35.56	33.02
IC-18P	103-018Z7TPKXX	22.86	20.32	IC-30P	103-030Z7TPKXX	40.64	38.10

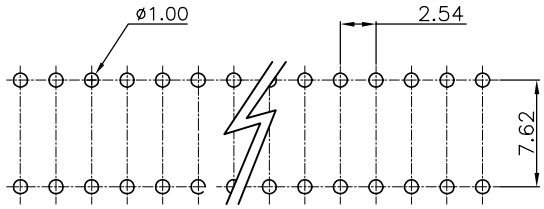

RECOMMEMDED PCB LAYOUT
GENERAL TOLERANCE ±0.08

-TOLERANCES-
UNLESS OTHERWISE SPECIFIED
公差參考表

X.X ±0.25	X.X° ±3°
X.XX ±0.15	X.XX° ±1°
X.XXX ±0.05	X.XXX° ±0.5°

TITLE: 產品名稱： IC2.54 W/ STICK
APPD: 核准： KEVIN
PRODUCT NO: 產品編號： 103-XXXZ7TPKXX
CHECK: 校對： TENA
DRAW: 繪圖： YUKI

DATE	SCALE	UNIT	TYPE	PAGE
2007.04.16	FREE	MM	H	1/1