




REV	MODIFICATION	DATE	DRAW	APPROVE
A	NEW DWG	07/08/10	HUANG	KEVIN

NOTES

1: MATERIAL:  
HOUSING: PBT+30%GF, BLACK, UL94V-0  
CONTACT: BRASS/PHOSPHOR BRONZE

2: FINISH:  
CONTACT PLATING: 100μ" TIN-LEAD OVER  
50μ" NICKEL.

3: SPECIFICATION:  
CURRENT RATING: 5A  
WITHSTANDING VOLTAGE: AC 1000V 1MINUTE  
INSULATION RESISTANCE: 1000MΩ 500V DC  
OPERATING TEMPERATURE: -55°C~105°C

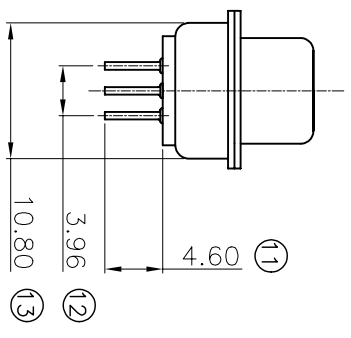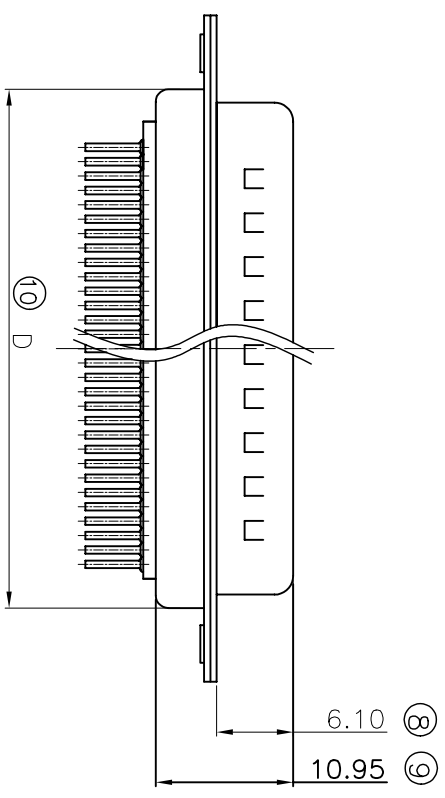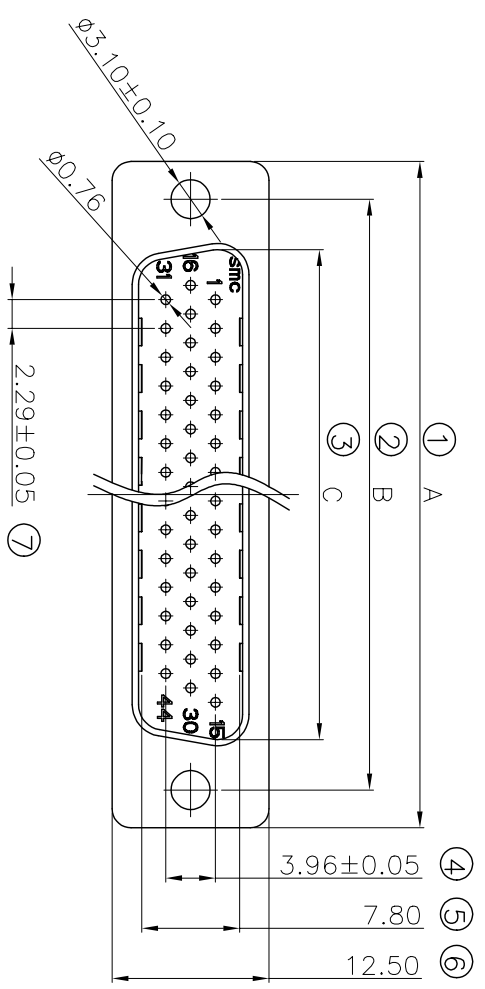

PIN NO.	DIM A	DIM B	DIM C	DIM D	P/N
15P	30.80	24.99	16.92	19.20	163-015MBXP01
26P	39.20	33.30	25.25	27.70	163-026MBXP01
44P	53.05	47.04	38.96	41.10	163-044MBXP01
62P	69.40	63.50	55.42	57.30	163-062MBXP01

UNLESS OTHERWISE SPECIFIED  
公差參考表

X.X ±0.25	X.X° ±3°
X.XX ±0.15	X.XX° ±1°
X.XXX ±0.05	X.XXX° ±0.5°

TITLE: 產品名稱: HDP 0.76 MALE 成品

APPD: KEVIN	PRODUCT NO: 163-XXXXMBXP01
CHECK: TENA	DATE: 2007.08.10
DRAW: HUANG	SCALE: FREE
	UNIT: MM
	TYPE: H
	PAGE: 1/2